


1. Product dimension:

## LED Tracking light

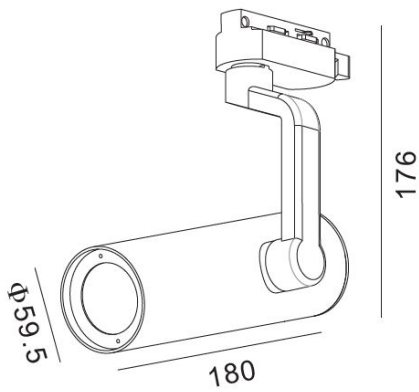

|          |  |
|----------|--|
| Model    | LED Track light:<br>SS-TK-CREE-COB-12W-15D,24D,38D,60D |
| Diameter | ∅ 59.5mm   |
| Height   | 176mm  |
| Length   | 180mm  |

2. Specification

|                           |   |
|---------------------------|---|
| Input Voltage (50HZ/60HZ) | 100-240V 300mA                            |
| Power                     | 12W                                       |
| Work temperature          | -40°C~+55°C                               |
| Life time                 | 50,000hrs                                 |
| Temp of the light         | ≤70° C                                    |
| Material                  | Aluminum light body + PC reflector        |
| Chip Brand                | Cree(1pc)                                 |
| Beam Angle                | 24° standard (15° /24° /38° 60° optional) |
| Emitting Color            | White(5000K) NW(4000K) WW(3000K)          |

|                  |   |
|------------------|---|
| CRI              | >80Ra   |
| Light Efficiency | 100-110Lm/W                                   |
| Warranty         | Three Years                                   |
| IP Rating        | IP20  |
| Wire             | two(standard) three /four circuit(s) optional |
| Package weight   | 8.9kg/carton(NG) 12.3kg/carton(GG)            |
| Housing          | Black/White                                   |

## 2. Specification

Can design according to the requirements of the guests lines to2, 3, 4 Wire Adapter

Aluminum cob Track lighting,sharp LED lamp

Housing material:Aluminum+Reflector+Class Cover

Surface treatment Color:Matt Black

Dimension:

Input Voltage:AC100-240V-50Hz/60 Hz

LED quantity:One

Power:12W

Light source:1X12W LED CREE COB

CRI: >80Ra

Lamp lumens: 100-110/w

Type of equipment:electronic ignition system

Whether the dimming power supply: no

Light angle: 24°(15°/24°/38°/60° optional )

LED Driver:Constant Current

Color temperature:

Warm white (3000K)

Natural White (4000K)

Cool White (5000K )

Lens: reflector and Glass Cover

Inbox size:9X9X28cm Carton size:48X48X30cm /25 Pcs/ N.W11.5kg/ G.W16kg


Guarantee period: 3 years

sales rooms:boutiques,galleries,

## 5. Application

shopping malls,car showrooms,museums,  
lighting of various vertical surfaces such as shelves,  
expositions,displays


Luminous Intensity Distribution Curve

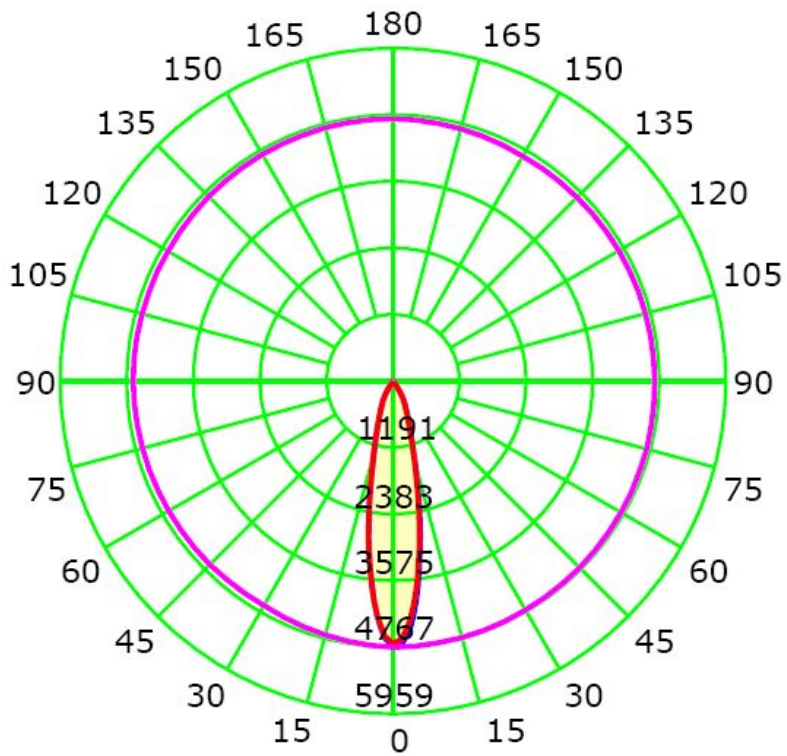

Average Diffuse Angle(50%): 22.0° Unit: cd

— C0-C180 — C90-C270 — G1


IsoLux Plot

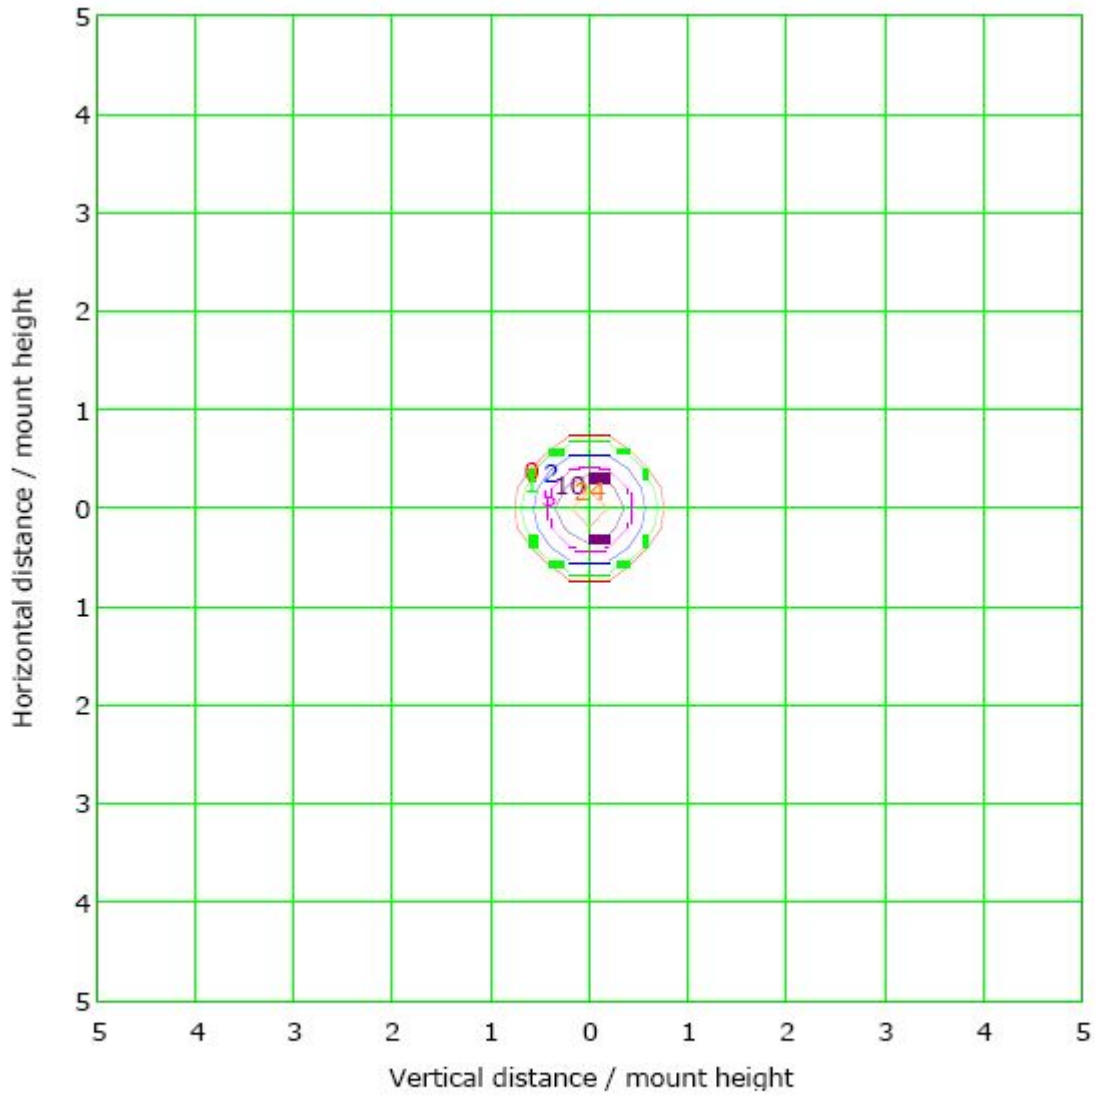

Mounting Height: 10.0m    Max Lux(100%): 47.7 lx

|                   |                   |
|-------------------|-------------------|
| — ( 1%): 0.5 lx   | — ( 2%): 1.0 lx   |
| — ( 5%): 2.4 lx   | — ( 10%): 4.8 lx  |
| — ( 20%): 9.5 lx  | — ( 50%): 23.8 lx |
| — (100%): 47.7 lx |                   |

# Illuminance at a Distance

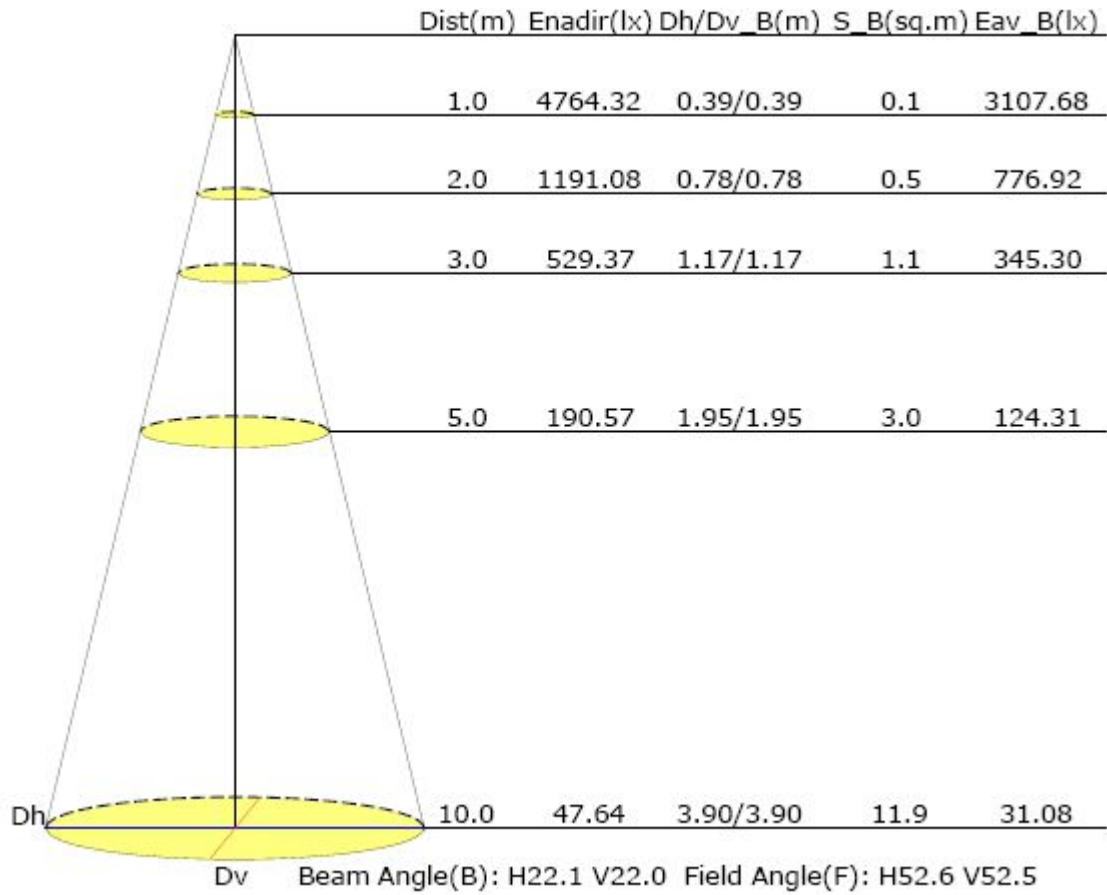

## 7. Package

Inbox size:9X9X28cm  
 Carton size:48X48X30cm 25 Pcs  
 N.W11.4kg/ G.W15.5kg

